




**Fiber Optic Cable
Furcation Tubing**
2mm Furcation Tubing

Part Number
713000-035XXX

Replace "XXX" with:

- BLU - BLUE
- ORG - ORANGE
- GRN - GREEN
- BRN - BROWN
- GRY - GREY
- WHT - WHITE
- RED - RED
- BLK - BLACK
- YEL - YELLOW
- VIO - VIOLET
- PNK - PINK
- AQU - AQUA

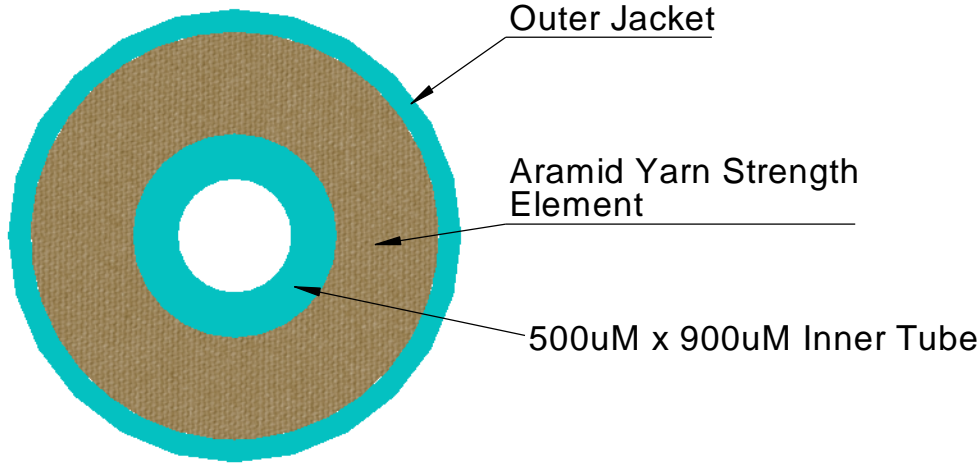

Mechanical:

Diameter:

Outer Tube: 0.079" (2.0mm) Tolerance +/- 0.003" (0.08mm)
Inner Tube: 0.020" x 0.035" (.5mm x .9mm) PVDF

Tensile Load:

Installation: 30lbs Max (133N)
Operating: 10lbs Max (44N)

Minimum Bend Radius:

Installation: 1.58" (4.01cm)
In Service: 0.79" (2.0cm)

Cable Weight: 1.7lbs/1000ft (2.54kg/km)

Operating Temperature: -40F to 185F (-40C to 85C)

Storage Temperature: -40F to 185F (-40C to 85C)

Construction:

Jacket Material:

Flame Retardant PVDF
Inner Tube: PVDF

Jacket Color:

Blue, Orange, Green, Brown, Slate, White,
Red, Black, Yellow, Violet, Pink, Aqua

Inner Tube Color: Natural

Strength Member: Dielectric Aramid Yarn Fibers

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.